

FRIGETTE BUS / TRANSPORT

Climate Solutions

Skirt-Mounted Condensers



70-07234

70-07233



Heavy Duty
A/C
Condenser
Solutions.

**Frigette**

Bus / Transport Climate Systems

SKIRT-MOUNTED CONDENSERS

Two Sizes - Many Applications

The Frigette Skirt-Mount Condensers are engineered to perform in extreme hot conditions, provide many years of service, install easily, and resist harsh weather and road conditions. Consider these advantages:

High Capacity - Engineered and tested in Frigette's extensive lab and wind tunnel facility to match or exceed the capacity of all comparable products. High heat-transfer copper tube/aluminum fin condenser coils are unsurpassed in the industry.


Long, Trouble Free Service Life - Corrosion resistant copper tubing, baked on powder coat paint, heavy gauge steel, extra-long-life fans, pressure switch protection, leak-free o-rings, refrigerant sealing, and high-capacity filter/driers insure long service life.

Easy to Service - When servicing is required, all components are in easy reach for quick servicing and replacement.

Easy to Install - Universal mounting brackets, hardened fasteners, easy to read instructions, and simple "no splice" wiring insures quick and easy installation. Frigette even provides handles on each end of the condenser for safer, easier handling.

Resistant to Weather and Road Hazards - Frigette's use of weather tight electrical connectors, water and dust resistant fan motors, copper tube/aluminum fin coils, and baked-on powder coated paint insure resistance to a variety of everyday and extreme conditions.

70-07234

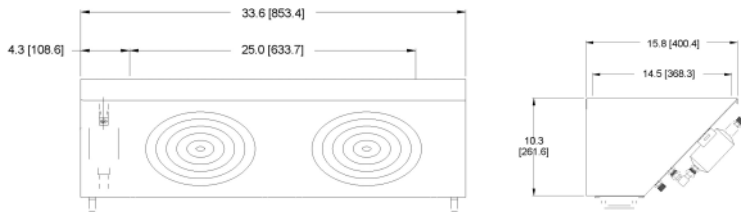


Specification Data

Condensing Capacity	57,000 BTU/HR (Rated at Industry Comparative Standards)
Condenser Coils	Rugged, high efficiency copper tube/aluminum fin construction.
Construction	Durable, 16 gauge cold rolled steel protected with powder coated black paint.
Cooling Fans	Two (2) 10" water and dust resistant, long-life (10,000 hrs) high-efficiency, grill protected fans.
Filter/Drier	16 cubic inch, o-ring drier equipped with moisture indicator.
Protection Devices	High pressure switch and low pressure switch
Fitting Connections	Inlet - #8 male insert o-ring (3/4-16) Outlet - #8 male insert o-ring (3/4-16)
Weight	55 lbs.
Dimensions	33.6" (L) x 15.8 (W) x 10.3 (H)
Warranty	Two years, limited

Frigette Condensers can be matched with Frigette's many other components to provide total system coverage.

70-07233

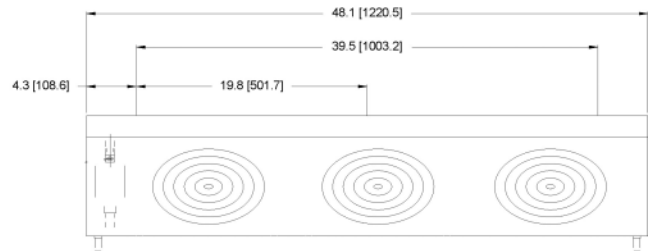

Specification Data

Condensing Capacity	76,000 BTU/HR (Rated at Industry Comparative Standards)
Condenser Coils	Rugged, high efficiency copper tube/aluminum fin construction.
Construction	Durable, 16 gauge cold rolled steel protected with powder coated black paint.
Cooling Fans	Three (3) 10" water and dust resistant, long-life (10,000 hrs) high-efficiency, grill protected fans.
Filter/Drier	16 cubic inch, o-ring drier equipped with moisture indicator.
Protection Devices	High pressure switch and low pressure switch
Fitting Connections	Inlet - #8 male insert o-ring (3/4-16) Outlet - #8 male insert o-ring (3/4-16)
Weight	64 lbs.
Dimensions	48.1" (L) x 15.8 (W) x 10.3 (H)
Warranty	Two years, limited

SCS/Frigette Skirt-Mounted Condensers - Engineered for a wide variety of bus applications. Engineered for maximum performance. Engineered for maximum dependability.



1200 West Risinger Road, Fort Worth, Texas 76134
 Phone: (800) 545-6341 Fax: (817) 568-1287
 Email: corp@scsfrigette.com Web Site: www.scsfrigette.com